



# SMART FLUID HEATER System



## 6 System application

The SMART FLUID HEATER System is shipped as a complete ready to use system which is designed to meet the most various challenges. The necessary system power and the tubing heat exchanger diameter and length is determined for the specific application which mainly depends on:

- the fluids' physical properties, i.e. heat capacity
- flow rate
- inlet temperature
- desired outlet temperature

Once the power requirement is determined, the complete system is built around the core.

## 7 A very flexible modular System

The SMART FLUID HEATER System is a modular system which can be adapted to any specific application. There is no limitation of how much power can be built into the system. The only limitation is the temperature class specific limits:

- Maximum fluid temperature for T4:  $\leq 194^{\circ}\text{F} / 90^{\circ}\text{C}$
- Maximum fluid temperature for T3:  $\leq 302^{\circ}\text{F} / 150^{\circ}\text{C}$

Within these temperature limits, the system can be designed for applications within a wide range. From the small test facility with a flow rate of 0,1 liter per hour to applications with a high flow rate. In principle, there are no limits of the SMART FLUID HEATER Systems power capacity.


## 8 Temperature management

On the outlet pipe, a sensor is placed and it reports the outlet temperature to the SMART digital temperature system controller. Through this technical solution, a high accuracy of the outlet temperature will be kept and maintained. The inlet temperature and the flow rate may change, the SMART controller will supervise the overall system and will keep the desired outlet temperature within a narrow tolerance. Also, if the flow rate would be reduced to nil, the SMART controller would respond at once: Reduce power and thereby protect the heating system and the fluid from over heating. The SMART controller is delivered with a sound setting of its' controlling parameters. But, through software, an application specific setting may tried out and implemented to meet specific needs: Temperature tolerance or reaction capability if the input temperature or flow rate changes rapidly. In fact, the SMART controller is at its' best when the temperature controlling task is exceedingly difficult.

## 9 Piping

Connect the SMART FLUID HEATER System inlet and outlet pipes to the existing pipe system which supplies the needed pressure and flow rate to keep the fluid in motion. The SMART FLUID HEATER System will then inject the necessary energy to reach the desired outlet temperature set point.

## 10 Electric Wiring

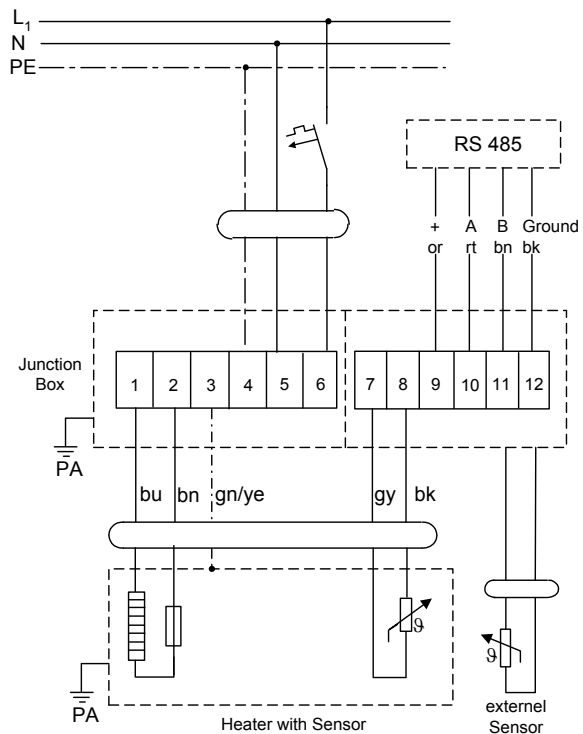

bu=blue bn=brown gy=grey bk=black gn/ye=green/yellow or=orange rt=red

The above electrical wiring diagram is valid for a system up till 500 W with one heater. For more powerful systems with more than one heater an individually designed wiring diagram is supplied.

## 11 Enclosure

Depending on the core system size, the SMART FLUID HEATER System is equipped with any suitable INTERTEC standard enclosure. This enables the system to be used in/out doors, to be mounted in vehicles, ships or anywhere where there is access to electrical power and a need to heat fluids in a hazardous area.

