

BASIC 100.129.xxx – double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP54

Vertical c-rails provided at the rear wall
 Door with 3-point locking device single lever handle and basquil-locking-device for left door and overlapflange of stainless steel

Arrangement


Floor: Sandwich-floor with PU-foam core 1.0"/ 25 mm (standard)

- Upon special request: GRP 0.2"/ 5 mm
- GRP 0.2"/ 5 mm with opening size (see data sheet [SD525](#), floor version C BASIC)

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window

- SG** swing handle with key lock burglary resistant
- C-VA** Vertical c-rails in stainless steel instead of galvanized steel, aluminum available
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

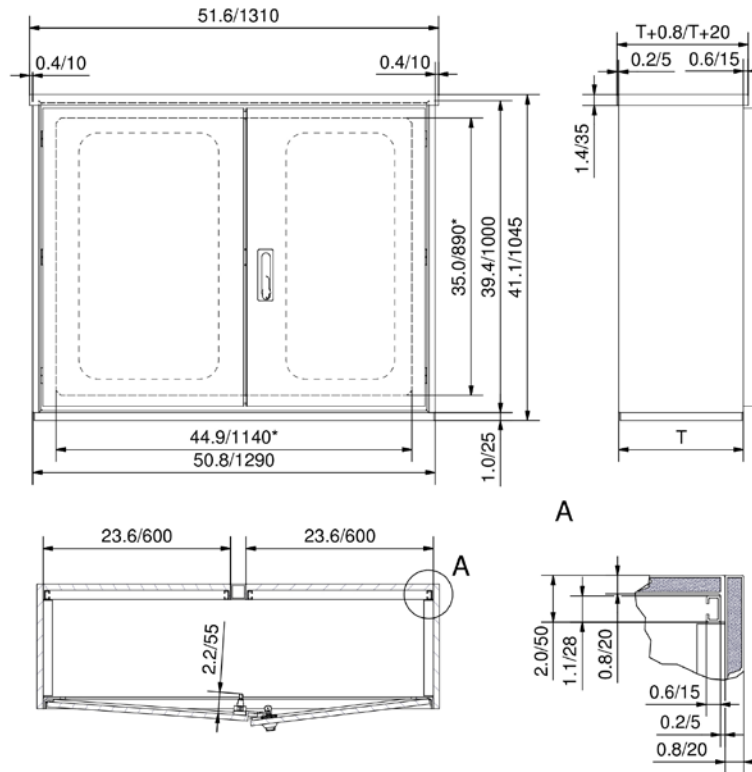

* clear opening

Dimensions in inches/ mm

Type	Sizes (inches / mm) with floor		
	H	B	T
100.129.030	41.1 / 1045	50.8 / 1290	11.8 / 300
100.129.040			15.8 / 400
100.129.060			23.6 / 600
100.129.080			31.5 / 800
100.129.100			39.4 / 1000

