

BASIC 150.xxx.xxx - single door

Glassfibre reinforced polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032

Protection class IP65
 Vertical c-rails provided at the rear wall
 Door with 3-point locking device and single lever handle

Arrangement


Floor: Sandwich-floor with PU-foam core 1.0"/ 25 mm (standard)

- Upon special request: GRP 0.2"/ 5 mm
- GRP 0.2"/ 5 mm with opening size (see [SD525](#) floor version C BASIC)

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window

- SG** burglary resistant swing handle with key lock
- C-VA** Vertical c-rails in stainless steel instead of galvanized steel, aluminum available
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

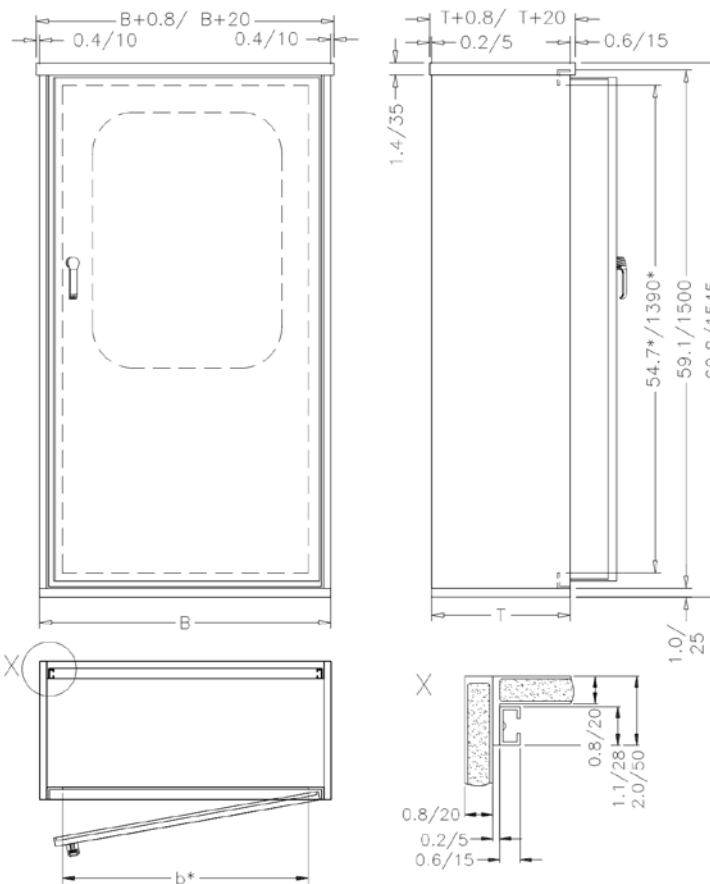

* clear opening

Dimensions in inches/ mm

| Type | Sizes (inches/ mm) with floor | | | |
|-------------|-------------------------------|------------|------------|-------------|
| | H | B | b | T |
| 150.040.030 | 60.8 / 1545 | 17.3 / 440 | 11.4 / 290 | 11.8 / 300 |
| 150.040.040 | | | | 15.8 / 400 |
| 150.040.060 | | | | 23.6 / 600 |
| 150.040.080 | | 25.2 / 640 | 19.3 / 490 | 31.5 / 800 |
| 150.040.100 | | | | 39.4 / 1000 |
| 150.060.030 | | | | 11.8 / 300 |
| 150.060.040 | | | | 15.8 / 400 |
| 150.060.060 | 23.6 / 600 | | | |
| 150.060.080 | 31.5 / 800 | | | |
| 150.060.100 | 39.4 / 1000 | | | |

| Type | Sizes (inches/ mm) with floor | | | |
|-------------|-------------------------------|-------------|------------|-------------|
| | H | B | b | T |
| 150.080.030 | 60.8 / 1545 | 33.1 / 840 | 27.2 / 690 | 11.8 / 300 |
| 150.080.040 | | | | 15.8 / 400 |
| 150.080.060 | | | | 23.6 / 600 |
| 150.080.080 | | 40.9 / 1040 | 35.0 / 890 | 31.5 / 800 |
| 150.080.100 | | | | 39.4 / 1000 |
| 150.100.030 | | | | 11.8 / 300 |
| 150.100.040 | | | | 15.8 / 400 |
| 150.100.060 | 23.6 / 600 | | | |
| 150.100.080 | 31.5 / 800 | | | |
| 150.100.100 | 39.4 / 1000 | | | |

