

BASIC 200.xxx.xxx - single door

Glassfibre reinforced polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032

Protection class IP65
 Vertical c-rails provided at the rear wall
 Door with 3-point locking device and single lever handle

Arrangement


Floor: Sandwich-floor with PU-foam core 1.0"/ 25 mm (standard)

- Upon special request: GRP 0.2"/ 5 mm
- GRP 0.2"/ 5 mm with opening size (see [SD525](#) floor version C BASIC)

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window

- SG** burglary resistant swing handle with key lock
- C-VA** Vertical c-rails in stainless steel instead of galvanized steel, aluminum available
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

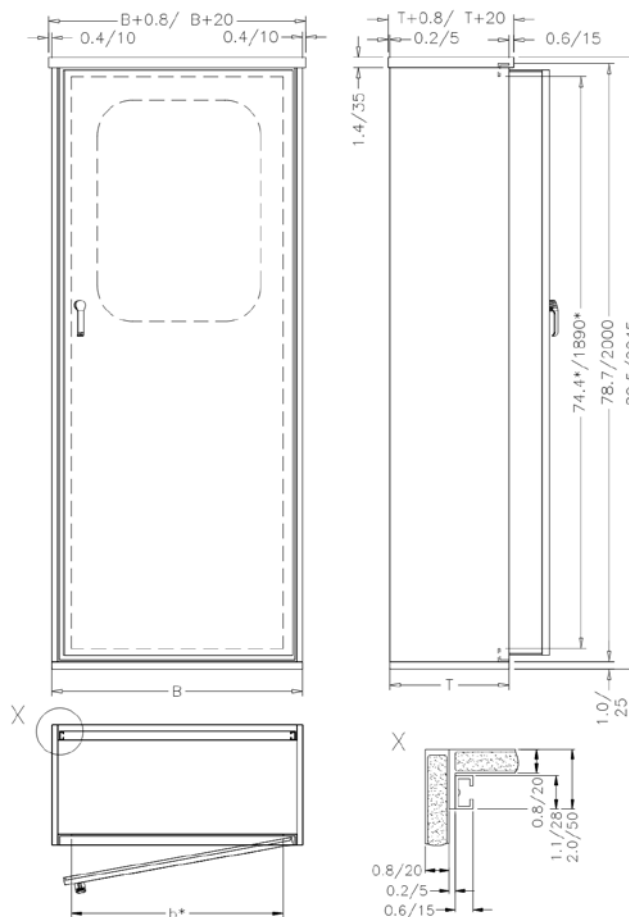

* clear opening

Type	Sizes (inches/ mm) with floor			
	H	B	b	T
200.040.030	80.5 / 2045	17.3 / 440	11.4 / 290	11.8 / 300
200.040.040				15.8 / 400
200.040.060				23.6 / 600
200.040.080				31.5 / 800
200.040.100				39.4 / 1000
200.060.030				25.2 / 640
200.060.040	15.8 / 400			
200.060.060	23.6 / 600			
200.060.080	31.5 / 800			
200.060.100	39.4 / 1000			

Dimensions in inches/ mm

Type	Sizes (inches/ mm) with floor			
	H	B	b	T
200.080.030	80.5 / 2045	33.1 / 840	27.2 / 690	11.8 / 300
200.080.040				15.8 / 400
200.080.060				23.6 / 600
200.080.080				31.5 / 800
200.080.100				39.4 / 1000
200.100.030				40.9 / 1040
200.100.040	15.8 / 400			
200.100.060	23.6 / 600			
200.100.080	31.5 / 800			
200.100.100	39.4 / 1000			

