

CLASSIC 110.175.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Corner posts of GRP with vertical c-rails
 Textured surface in grey RAL 7032
 Protection class IP54


Vertical c-rails provided at the side wall and rear wall
 Door with 3-point locking device single lever handle and basquil-locking-device for left door and overlapflange of stainless steel
 Roof overhang 25 mm/ 1.0" all around

Arrangement

Floor (see data sheet [SD522](#) „Floor versions for classic series“)

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window
- SG** swing handle with key lock burglary resistant
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) „Fastenings for classic-floor versions design ...“)
- WA** Wall fastening inside/ outside
- SZ** Ground vault

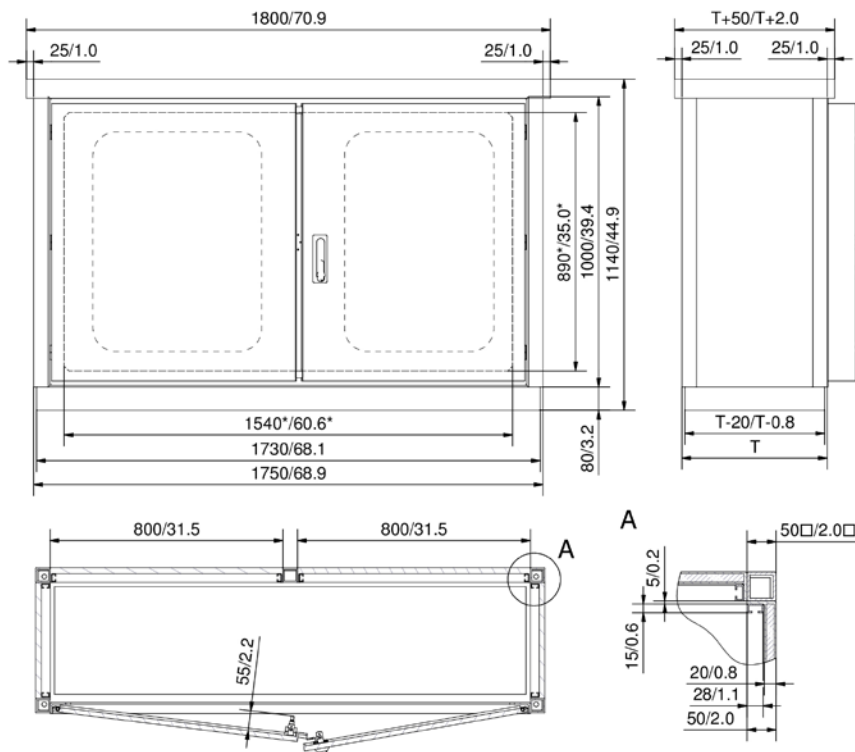

* clear width

Dimensions in mm/inches

| Type | Sizes (mm / inches) with floor | | |
|-------------|--------------------------------|-------|------------|
| | H | B | T |
| 110.175.050 | | | 500/ 19.7 |
| 110.175.070 | 1140/ | 1750/ | 700/ 27.6 |
| 110.175.090 | 44.9 | 68.9 | 900/ 35.4 |
| 110.175.110 | | | 1100/ 43.3 |

