

# CLASSIC 160.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Corner posts of GRP with vertical c-rails  
 Textured surface in grey RAL 7032


Protection class IP65  
 Vertical c-rails provided at the side wall and rear wall  
 3-point locking device with lockable lever handle  
 Roof overhang 25 mm/ 1.0" all around

## Arrangement

Floor (see data sheet [SD522](#) „Floor versions for classic series“)

## Options

- MP** Mounting plate
- FA/FS**  Acrylic glass/  Safety glass window
- SG** swing handle with key lock
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) „Fastenings for classic-floor versions design ...“)
- WA** Wall fastening  inside/  outside
- SZ** Ground vault

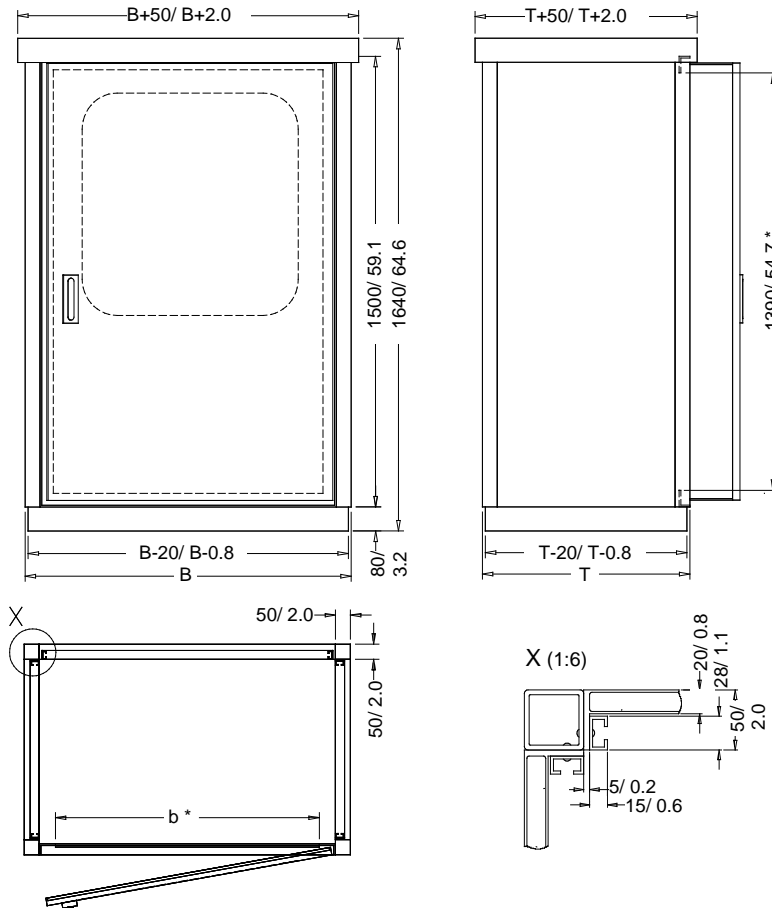

\* clear width

Dimensions in mm/ inches

Type	Sizes (mm / inches) with floor			
	H	B	b	T
160.070.050	1640/ 64.6	700/ 27.6	490/ 19.3	500/ 19.7
160.070.070				700/ 27.6
160.070.090				900/ 35.4
160.070.110				1100/ 43.3
160.090.050		900/ 35.4	690/ 27.2	500/ 19.7
160.090.070				700/ 27.6

Type	Sizes (mm / inches) with floor			
	H	B	b	T
160.090.090	1640/ 64.6	900/ 35.4	690/ 27.2	900/ 35.4
160.090.110				1100/ 43.3
160.110.050		1100/ 43.3	890/ 35.0	500/ 19.7
160.110.070				700/ 27.6
160.110.090				900/ 35.4
160.110.110				1100/ 43.3

