

# CLASSIC 210.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Corner posts of GRP with vertical c-rails  
 Textured surface in grey RAL 7032

Protection class IP65  
 Vertical c-rails provided at the side wall and rear wall  
 3-point locking device with lockable lever handle  
 Roof overhang 25mm/ 1.0" all around


## Arrangement

Floor (see data sheet [SD522](#) "Floor versions for classic series")

## Options

- MP** Mounting plate
- FA/FS**  Acrylic glass/  Safety glass window
- SG** swing handle with key lock

- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) "Fastenings for classic-floor versions design ...")
- WA** Wall fastening  inside/  outside
- SZ** Ground vault

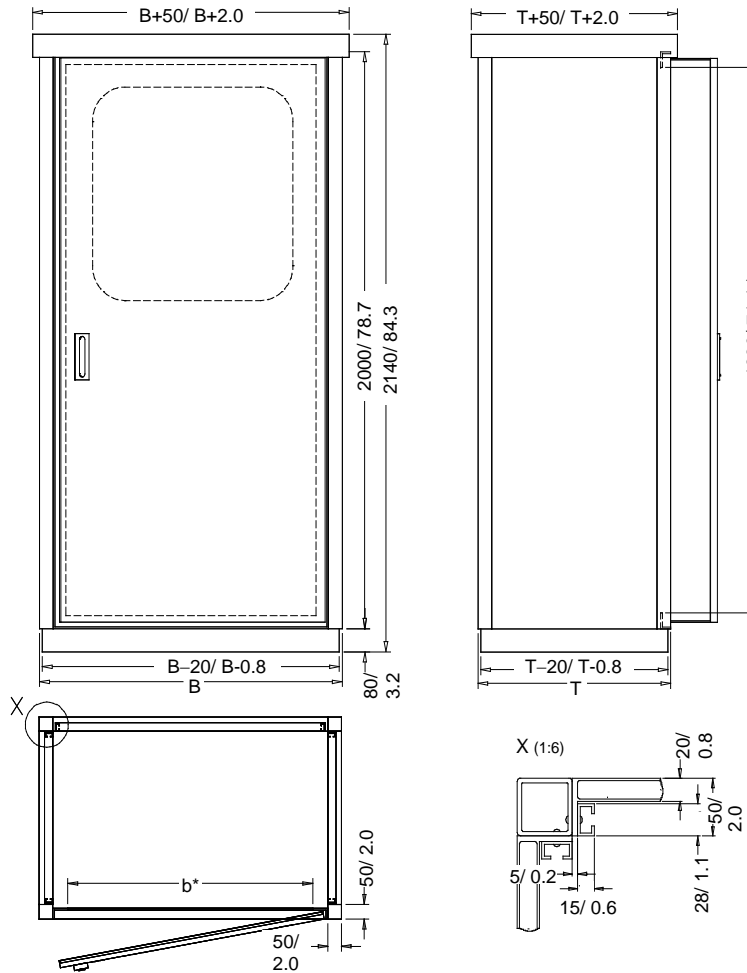

\* clear width

Type	Sizes (mm / inches) with floor			
	H	B	b	T
210.070.050	2140/ 84.3	700/ 27.6	490/ 19.3	500/ 19.7
210.070.070				700/ 27.6
210.070.090				900/ 35.4
210.070.110		1100/ 43.3		
210.090.050		900/ 35.4	690/ 27.2	500/ 19.7
210.090.070				700/ 27.6

Type	Sizes (mm / inches) with floor			
	H	B	b	T
210.090.090	2140/ 84.3	900/ 35.4	690/ 27.2	900/ 35.4
210.090.110				1100/ 43.3
210.110.050		1100/ 43.3	890/ 35.0	500/ 19.7
210.110.070				700/ 27.6
210.110.090				900/ 35.4
210.110.110				1100/ 43.3

Dimensions in mm/ inches

