

# CLASSIC 210.155.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction,  
 insulated with polyurethane foam core  
 Corner posts of GRP with vertical c-rails  
 Textured surface in grey RAL 7032  
 Protection class IP54


Vertical c-rails provided at the side wall and rear wall  
 Door with 3-point locking device single lever handle and  
 basquil-locking-device for left door and overlapflange of  
 stainless steel  
 Roof overhang 25mm/ 1.0" all around

## Arrangement

Floor (see data sheet [SD522](#) "Floor versions for classic series")

## Options

- MP** Mounting plate
- FA/FS**  Acrylic glass/  Safety glass window
- SG** swing handle with key lock burglary resistant
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) "Fastenings for classic-floor versions design ...")
- WA** Wall fastening  inside/  outside
- SZ** Ground vault

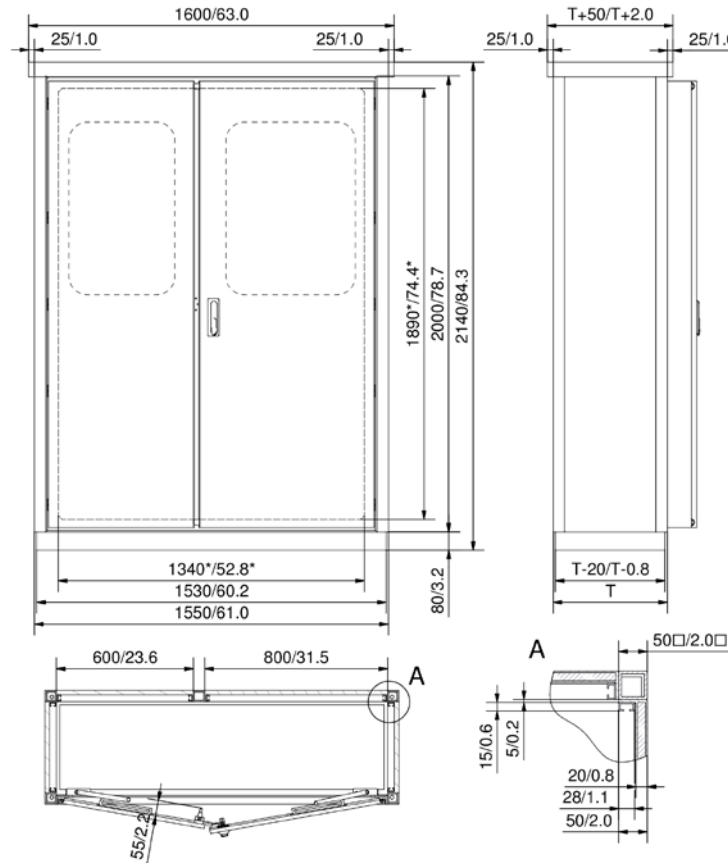

\*clear width

Dimensions in mm/ inches

Type	Sizes (mm / inches) with floor		
	H	B	T
210.155.050	2140/ 84.3	1550/ 61.0	500/ 19.7
210.155.070			700/ 27.6
210.155.090			900/ 35.4
210.155.110			1100/ 43.3

