

CLASSIC 210.175.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction,
 insulated with polyurethane foam core
 Corner posts of GRP with vertical c-rails
 Textured surface in grey RAL 7032
 Protection class IP54


Vertical c-rails provided at the side wall and rear wall
 Door with 3-point locking device single lever handle and
 basquil-locking-device for left door and overlapflange of
 stainless steel
 Roof overhang 25mm/ 1.0" all around

Arrangement

Floor (see data sheet [SD522](#) "Floor versions for classic series")

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window
- SG** swing handle with key lock burglary resistant
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) "Fastenings for classic-floor versions design ...")
- WA** Wall fastening inside/ outside
- SZ** Ground vault

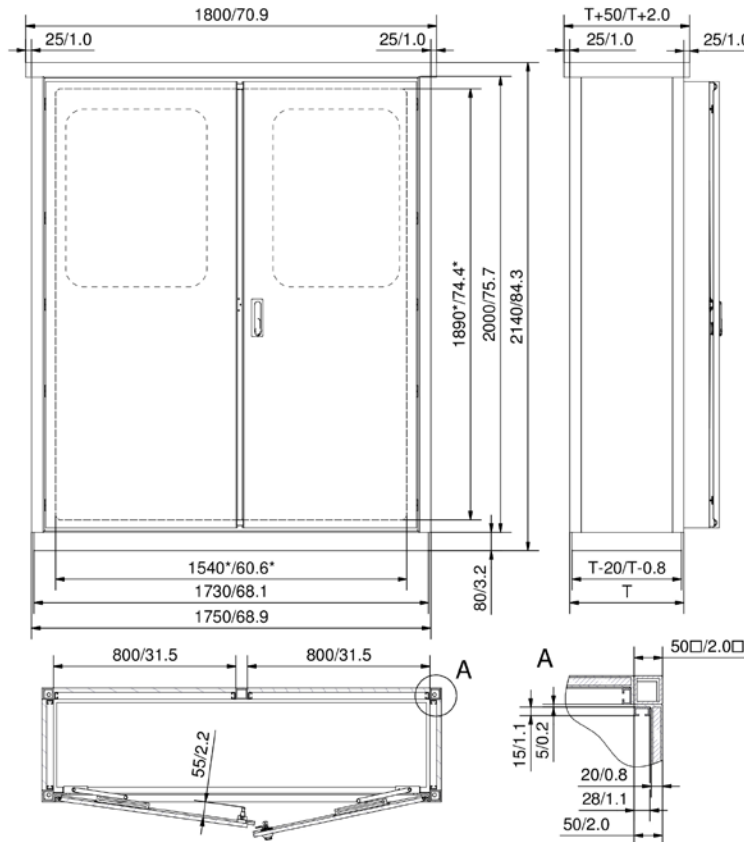

* clear width

Dimensions in mm/ inches

Type	Sizes (mm / inches) with floor		
	H	B	T
210.175.050	2140/ 84.3	1750/ 68.9	500/ 19.7
210.175.070			700/ 27.6
210.175.090			900/ 35.4
210.175.110			1100/ 43.3

