

BASIC 150.xxx.xxx - single door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Textured surface in grey RAL 7032
 Protection class IP65

Vertical c-rails provided at the rear wall
 Door with 3-point locking device and burglary-resistant swing handle with profile cylinder to DIN 18252

Arrangement


Floor: Sandwich-floor with PU-foam core 25 mm (standard)

- Upon special request: GRP 5 mm
- GRP 5 mm with opening size (see data sheet [SD525](#), floor version C BASIC)

- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening
- WA** Wall fastening inside/ outside
- SZ** Ground vault for installation in the ground

Options

- MP** Mounting plate

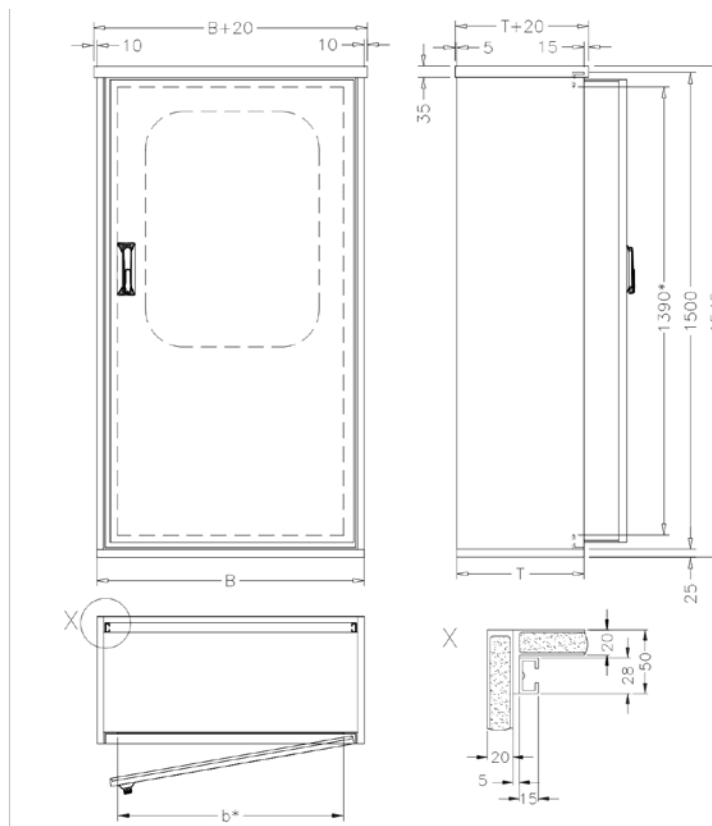

* clear width

Type	Sizes (mm) with floor			
	H	B	b	T
150.040.030	1545	440	290	300
150.040.040				400
150.040.060				600
150.040.080				800
150.040.100				1000
150.060.030				640
150.060.040	400			
150.060.060	600			
150.060.080	800			
150.060.100	1000			

Type	Sizes (mm) with floor			
	H	B	b	T
150.080.030	1545	840	690	300
150.080.040				400
150.080.060				600
150.080.080				800
150.080.100				1000
150.100.030				1040
150.100.040	400			
150.100.060	600			
150.100.080	800			
150.100.100	1000			