

# BASIC 101.xxx.035


Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core  
 Textured surface in grey RAL 7032  
 Protection class IP65  
 Heat transfer coefficient  $k=1,5 \text{ Watt/m}^2\text{Kelvin}$

Clasps and hinges, stainless steel 316 (1.4571)  
 3-point locking device with burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)  
 EPDM gasket

## Optionen

- MP** Mounting plate in
  - steel, zinc coated /  stainless steel
- C-rail** Vertical c-rails in  stainless steel /  anodized aluminium /  UNISTRUT
- FA/FS**  acrylic glass/  safety glass window

- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- Colour** Special colour to RAL o request
- WA** Wall fastening  inside/  outside

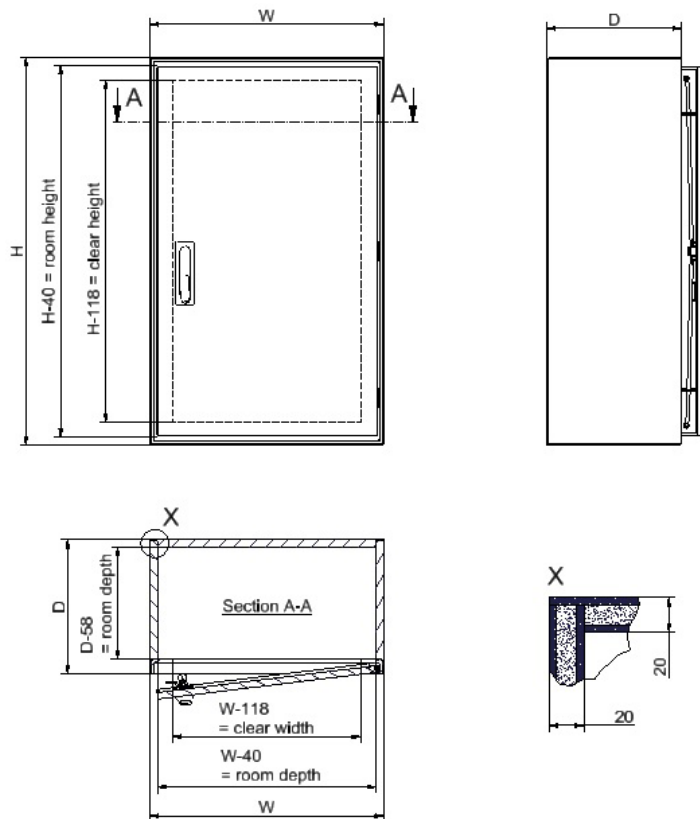

| Type (Standard)          | Hight H | Width W | Depth D |
|--------------------------|---------|---------|---------|
| <b>BASIC 101.064.035</b> | 1040    | 640     | 350     |
| <b>BASIC 101.084.035</b> | 1040    | 840     | 350     |
| <b>BASIC 101.104.035</b> | 1040    | 1040    | 350     |