

CLASSIC 210.195.xxx - double door

Reinforced glassfibre polyester parts, sandwich construction, insulated with polyurethane foam core
 Corner posts of GRP with vertical c-rails
 Textured surface in grey RAL 7032
 Protection class IP54


Vertical c-rails provided at the side wall and rear wall
 Door with 3-point locking device with burglary-resistant swing handle with profile cylinder to DIN 18252 (lockable)
 Basquill-locking-device for left door and overlapflange of stainless steel

Arrangement

Floor (see data sheet [SD522](#) "Floor versions for classic series")

Options

- MP** Mounting plate
- FA/FS** Acrylic glass/ Safety glass window
- C-VA** Vertical c-rails in stainless steel instead of aluminium
- GO** Antistatic to avoid electrostatic charges according to EN IEC 60079-0
- SB** Floor fastening (see data sheet [SD523](#) "Fastenings for classic-floor versions design ...")
- WA** Wall fastening inside/ outside
- SZ** Ground vault

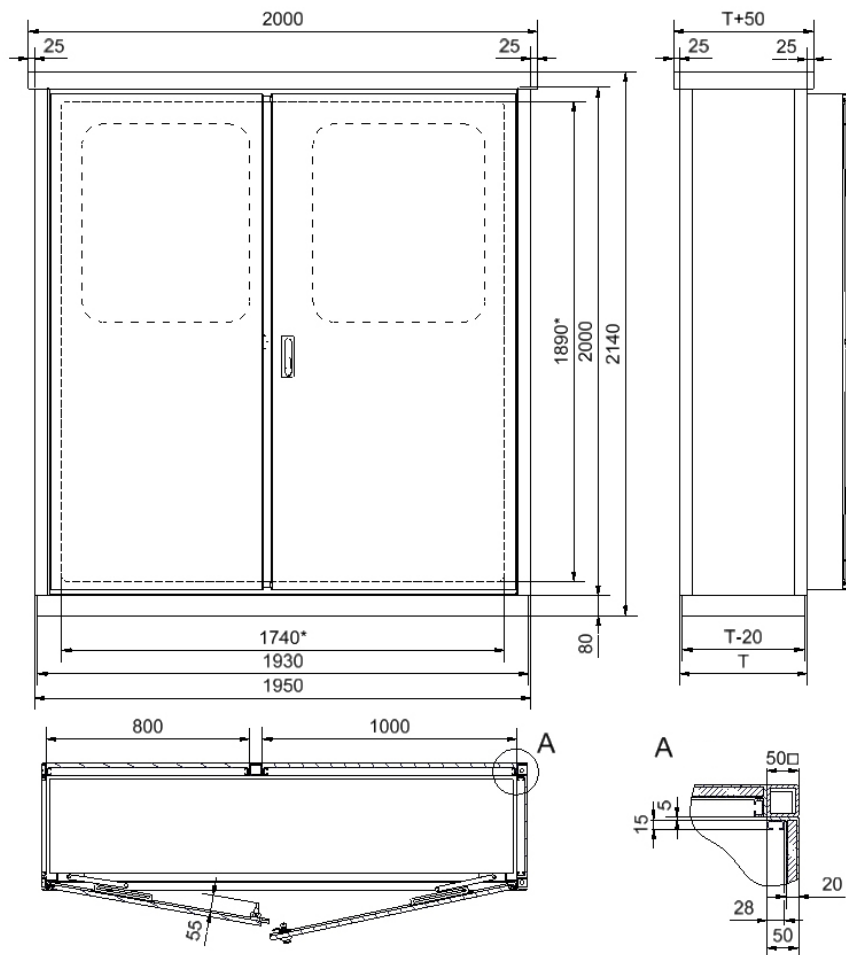

* clear width

Type	Sizes (mm) with floor		
	H	B	T
210.195.050	2140	1950	500
210.195.070			700
210.195.090			900
210.195.110			1100